


Hand Pallet Trucks

High Standards and Experienced Engineering provide Superior Quality !

Blue Label - pallet trucks provide -

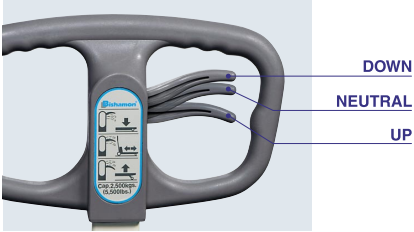

Comfortable Molded Grip Handle
Molded handle design provides comfort and a strong grip

3 Position Fingertip Control
3 position Control Lever provides easy fingertip control of complete hydraulic system

Standard Features



Polyurethane Wheels
Aluminum hub steer wheels and alminum hub fork(load) wheels are standard

Lead Free Paint
Bishamon pallet trucks are painted with environmentally friendly lead free paint.

Optional Features





Bogie Wheels
Bogie Wheels are standard with model BM30



Parking Brake



Wheels
Nylon Wheels - available with Model BM20 & 25 (Except Low Profile Model) as an option.

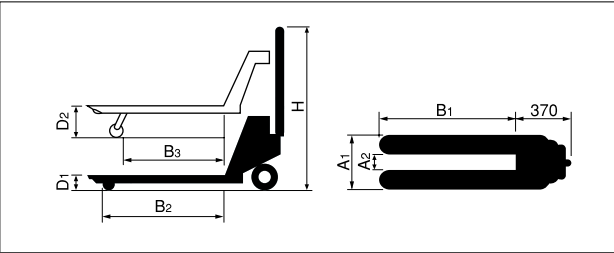

A	Standard Model	2,000 Kgs. Capacity	Fork M/M Height	80 mm
B	Special Width Model	2,000 Kgs. Capacity	Fork M/M Height	80 mm
C	Standard Model	2,500 Kgs. Capacity	Fork M/M Height	80 mm
D	Standard Low Profile Model	1,500 & 2,500 Kgs. Capacity	Fork M/M Height	65 mm
E	3 Ton Capacity Model	3,000 Kgs. Capacity	Fork M/M Height	83 mm
F	50 mm Low Profile Model	1,200 Kgs. Capacity	Fork M/M Height	50 mm
G	40 mm Super Low Profile Model	1,000 Kgs. Capacity	Fork M/M Height	40 mm

Model	Model No.	Capacity (Kg)	Width (mm)	Length (mm)	Height (mm)	Height (mm)	Width (mm)	Length (mm)	Length (mm)	Weight (Kgs.)
A	BM20SS	2,000	A1	B1	D1	D2	A2	B2	B3	
	BM20S		520	810	80	200	214	675	525	72
	BM20M		520	980	80	200	214	845	695	75
	BM20L		520	1,070	80	200	214	935	785	79
	BM20C		520	1,150	80	200	214	1,015	865	81
	BM20LL		685	1,070	80	200	379	935	785	85
B	BMP20-48SS	2,000	685	1,220	80	200	379	1085	935	88
	BMP20-48S		480	810	80	200	174	675	525	71
	BM20-60M		480	980	80	200	174	845	695	75
	BM20-60LL		600	1,070	80	200	294	935	785	82
C	BM25SS	2,500	600	1,220	80	200	294	1,085	935	85
	BM25S		520	810	80	200	214	675	525	86
	BM25M		520	980	80	200	214	845	695	88
	BM25L		520	1,070	80	200	214	935	785	89
	BM25C		520	1,150	80	200	214	1,015	865	90
	BM25F		685	1,070	80	200	379	935	785	97
D	BM25LL	2,500	685	1,150	80	200	379	1,015	865	98
	BM15SS-L65		685	1,220	80	200	379	1,085	935	99
	BM15M-L65		520	810	65	165	214	675	545	68
	BM15LL-L65		520	1,070	65	165	214	935	805	75
	BM25M-L65		685	1,220	65	165	379	1,085	955	83
	BM25LL-L65		520	1,070	65	165	214	935	805	85
E	BM30SS	3,000	685	1,220	65	165	379	1,085	955	95
	BM30S		520	810	82.5	202.5	214	735	480	100
	BM30M		520	980	82.5	202.5	214	905	650	103
	BM30L		520	1,070	82.5	202.5	214	995	740	105
	BM30D		520	1,150	82.5	202.5	214	1,075	820	107
	BM30C		685	810	82.5	202.5	379	735	480	105
F	BM30LL	3,000	685	1,070	82.5	202.5	379	995	740	107
	BM12SS-L50		685	1,220	82.5	202.5	379	1,145	890	110
	BM12M-L50		520	810	50	140	214	665	555	68
	BM12LL-L50		520	1,070	50	140	214	1070	925	75
G	BM10SS-L40	1,000	685	1,220	50	140	379	1075	965	83
	BM10S-L40		520	810	40	115	214	685	535	64
	BM10M-L40		520	980	40	115	214	855	705	67
	BM10C-L40		520	1,070	40	115	214	945	795	71
			685	1,070	40	115	379	945	795	71

Hand Pallet Trucks 4ton & 5ton

High capacity model Capacity 4000~5000kg



Auxiliary wheel




Lowering Speed Controller



Parking Brake with Foot Guard



Bogie Wheels

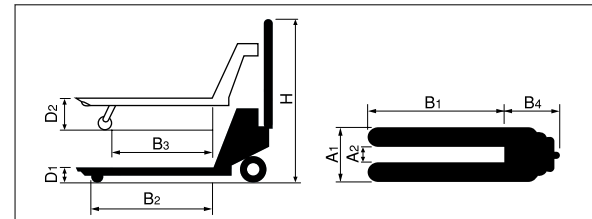

Model	Capacity (Kg)	Width (mm)	Length (mm)	Height (mm)	Height (mm)	Width (mm)	Length (mm)	Length (mm)	Length (mm)	Weight (Kgs.)
		A1	B1	D1	D2	A2	B2	B3	B4	
BM40M	4,000	520	1,070	83	202	214	992	759	410	155
BM40LL		685	1,220			379	1,139	906	414	175
BM40L5			1,600			379	1,519	1,284	414	220
BM50L4	5,000	685	1,500	85	205	285	1,432	1,197	416	260
BM50L6			1,800			285	1,732	1,496	416	300
BM50L7			2,000			285	1,932	1,695	416	320

Specifications are subject to change without notice.

BDH Hand Pallet Trucks

With battery powered lifting and driving, anyone can operate them

Battery Powered Lift & Drive Models Capacity 1500kg



Capacity up to 1,500kg



Battery Charger



Safety Switch




Simple Switches
Emergency Stop Switch



Collapse Prevention
Stand

Model	Fork					Total Length	Total Width	Turning Radius	Weight (kg)
	External Width	Internal Width	Length						
	A1	A2	B1	B2	B3				
BDH15M	520	220	1070	903	766	1541	560	R1405	210
BDH15S			980	813	676	1451		R1315	207
BDH15E			1220	1053	916	1691		R1555	213
BDH15-60M	600	300	1070	903	766	1541	600	R1405	211
BDH15-60LL			1220	1053	916	1691		R1555	215
BDH15C	685	385	1070	903	766	1541	685	R1405	217
BDH15LL			1220	1053	916	1691		R1555	220

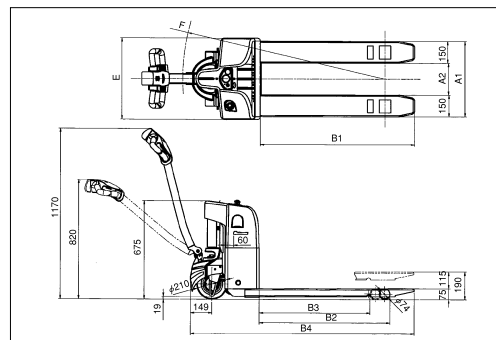

OPTION for Cold Strage and Water BISHAMON'S PROPOSAL

Options for the site where it is cold or wet

OPTION 1



For the site that is cold region and cold strage



Standard Model



Hyd. Oil for cold temperature up to -15 °C

OPTION 2



For the site which floor is wet



Standard parts are
made of steel



Nylon wheel + Stainless Bearing




Grease nipple on axles

OPTION 3



For the site dripping water

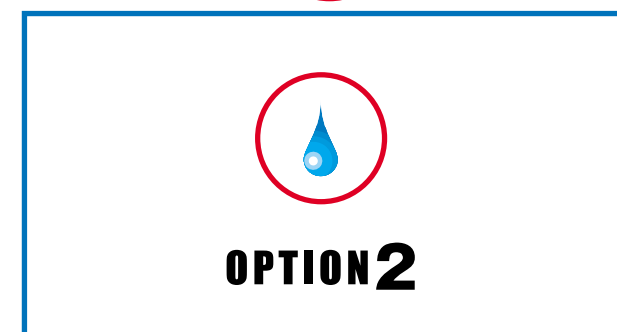

OPTION 2



Axle and its bush are made of stainless