

Mobile Lift Table

Capacity 150~800kg

BX Series add the value of mobility to a table

Manually Operated Model



The BX15 handle is collapsible.



Model	Maximum Capacity	Table Dimensions	Table Height	Total Height	Total Width	Total Length	Wheels	Adjustable Wheels	Pumping Count	Weight	Options
	(kg)	WidthXLength (mm)	(mm)	(mm)	(mm)	(mm)			(Number of Times)	(kg)	Hakacell
BX15W	150	500X813	380~1,350	898	500	1,046	φ100 Rubber	Support Wheels	31	93	○
BX15	150	450X700	215~733	798	450	854			15	33	○ (3sides)
BX30	300	500X813	290~867	898	500	1,008			25	69	○
BX30W	300	518X1,010	433~1,578	961	520	1,270	φ150 Urethane		64	138	○
BX50	500		438~998	961	520	1,195			50	112	○
BX50SW	500		460X650	419~1,004	940	460	938		φ125 Urethane	66	
BX80	800	518X1,010	438~998	961	520	1,270	φ150 Urethane		67	115	

Battery Powered Model



Lift and lower using dial Speed is adjustable

Battery charger installed



Model	Maximum Capacity	Table Dimensions	Table Height	Total Height	Total Width	Total Length	Wheels	Adjustable Wheels	Lifting Time	Lifting Count	Battery	Weight	Options
	(kg)	WidthXLength (mm)	(mm)	(mm)	(mm)	(mm)			(sec)	(Number of Times)		(kg)	Hakacell
BX15WB	150	500×813	380~1,380	890	500	1,072	φ100 Rubber	Support Wheels	10	110	12V/18AHX2 (Shielded)	129	○
BX30B	300		290~860						9			106	○
BX30WB		518×1,010	430~1,600	13	100	183	○						
BX50B	440~1,015		11	110	153	○							
BX80B	440~1,000		15	100	163								

Examples of Use



Mobile Work Positioner

Collapsed Capacity 10~600kg

ESX Series are fully adjustable, weight sensitive, self-leveling, mobile positioners with lifting function



Model	Adjustable Range	Table Dimensions	Table Height	Total Height	Total Width	Total Length	Wheels	Adjustable Wheels	Weight	Options		
	(kg)	WidthXLength (mm)	(mm)	(mm)	(mm)	(mm)			(kg)	Hakacell		
ESX05	10~50	450X700	262~659	798	450	836	φ100 Rubber	Support Wheels	38	○ (3 sides)		
ESX08	20~80		262~650									
ESX10	30~100		262~659									
ESX10L	40~100	500X813	352~787	898	500	998			φ125 Urethane	62.5	○	
ESX21	80~210		352~772									
ESX21L	55~210	518X1,010	374~803	941	520	1,191	φ150 Urethane	104				
ESX40	100~400		374~794									
ESX60	220~600		393~813									

Self-Leveling Functions


As the load weight changes, the table either raises or lower, keeping the top of the load at a convenient height.



Fully Adjustable Weight Selector Pointer travels along weight scale to highlight capacity as knob is turned

Load and Height Chart (Model ESX21)

The above chart shows the ESX21 at a setting of 210Kgs. and 80Kgs.

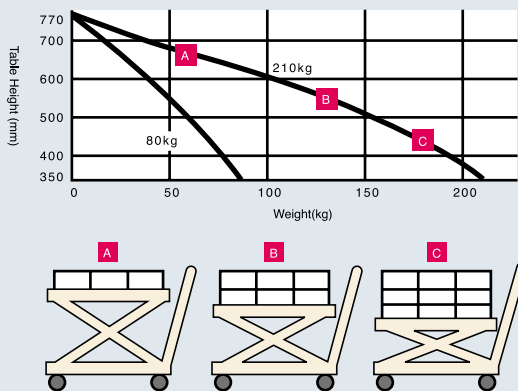

Examples of Use

