


Heavy Duty Lift Tables

The Simple Solution to Lifting Heavy Loads to a Comfortable Working Height

NX Series Capacity **1000kg**

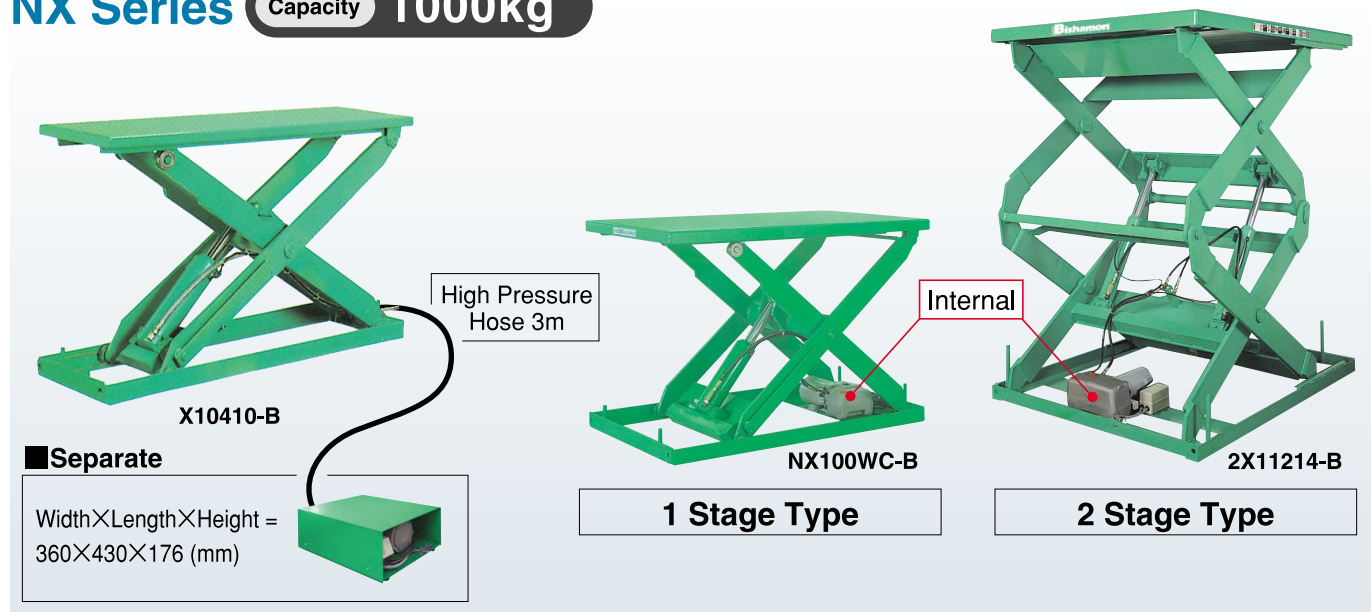

1 Stage Type														
Model	Maximum Capacity	Lifting Height	Table Dimensions (mm)				Motor	Lifting Speed (sec)		Weight	Hydraulic Unit	Cable (m)		High Pressure Hose
	(kg)	(mm)	Width	Length	Minimum Height	Maximum Height	(kw)	50Hz	60Hz	(kg)		Power Source	Operating SW	(m)
X10410-B	1,000	600	400	1,000	155	755	0.75	13	11	163	Separate	5		3
X10413-B		845		1,340		1,000		24	20	210				
X10415-B		950		1,500		1,155				248				
NX100NA-B		400	640	850	155	555	0.75	10	8	166	Internal	4.3	3	—
NX100NB-B		600		1,000		755		13	11	180				
NX100NC-B		845		1,340		1,000		24	20	230				
NX100ND-B		950		1,500	205	1,155	17	14	253	4.9				
NX100NE-B		1,305		1,800		1,510	25	21	318			4.8		
NX100WA-B		400		850	155	555	0.75	10	8	185				
NX100WB-B		600	1,000	755		13		11	199					
NX100WC-B		845	1,340	1,000		24		20	249					
NX100WD-B		950	780	1,500	205	1,155	1.13	17	14	274		4.9		
NX100WE-B		1,305		1,800		1,510		25	21	340				
NX100WCY-B		845		1,340	155	1,000	0.75	24	20	264				
NX100WDY-B		950	1,000	1,500	205	1,155	1.13	17	14	286		4.8		
NX100WEY-B		1,305		2,000		1,510		25	21	362				
X11224-B				1,200	2,400	207	1,512		25	21	505			
2 Stage Type														
2X10607-B	1,000	900	600	780	255	1,155	0.75	33	28	231	Internal	4.8	3	—
2X10610-B		1,250		1,000		1,505		45	38	255				
2X10910-B				850		1,150		1,505	24	20				
2X10611-B		1,400	600	1,150	1,655		1.13		28	23				
2X10911-B			850			365								
2X11211-B			1,200			385								
2X10614-B		1,800	600	1,400	306	2,106	1.13	34	28	375				
2X10914-B			850							405				
2X11214-B			1,200							600				
2X10618-B		2,400	600	1,850	356	2,756	1.5	49	41	605				
2X10918-B			850							726				
2X11218-B			1,200							827				

Regarding Specifications (see pages 25, 26)

(N) X ○ ○ - B

※Push buttons are standard



NX Series

Capacity **2000~3000kg**



Model	Maximum Capacity	Lifting Height	Table Dimensions (mm)				Motor	Lifting Speed (sec)		Weight	Hydraulic Unit	Cable (m)		High Pressure Hose
	(kg)	(mm)	Width	Length	Minimum Height	Maximum Height	(kw)	50Hz	60Hz	(kg)		Power Source	Operating SW	(m)
X20713-B	2,000	800	700	1,300	200	1,000	1.5	18	15	340	Internal	4.7	3	—
X21013-B			1,000							388				
X20715-B		1,000	700	1,500	215	1,215		23	19	378				
X21015-B			1,000					30	25	428				
X21020-B		1,250	1,000	2,000	250	1,500				515				
X21224-B			1,200	2,400	252	1,502				620				
X30713-B	3,000	800	700	1,300	235	1,035		22	19	383				
X31013-B			1,000							435				
X30715-B		1,000	700	1,500	245	1,245		30	25	421				
X31015-B			1,000							482				
X31020-B		1,250	2,000					38	31	573				
X31224-B			1,200	2,400	280	1,530				670				

EL100-F (Rotating platform comes standard)



Movable Skid Type



Mawaru Rotating Platform



Foot Switch

※Can also be attached to other models.

Model	Maximum Capacity	Lifting Height	Table Dimensions (mm)				Motor	Lifting Speed (sec)		Weight	Hydraulic Unit	Cable (m)		High Pressure Hose
	(kg)	(mm)	Width	Length	Minimum Height	Maximum Height	(kw)	50Hz	60Hz	(kg)		Power Source	Operating SW	(m)
EL100-F	1,000	600	1,015	1,015	326	926	0.75	13	11	317	Internal	4.3	3	—